


**CURVA DE RENDIMIENTO**

**SERIE FWSP 4"**

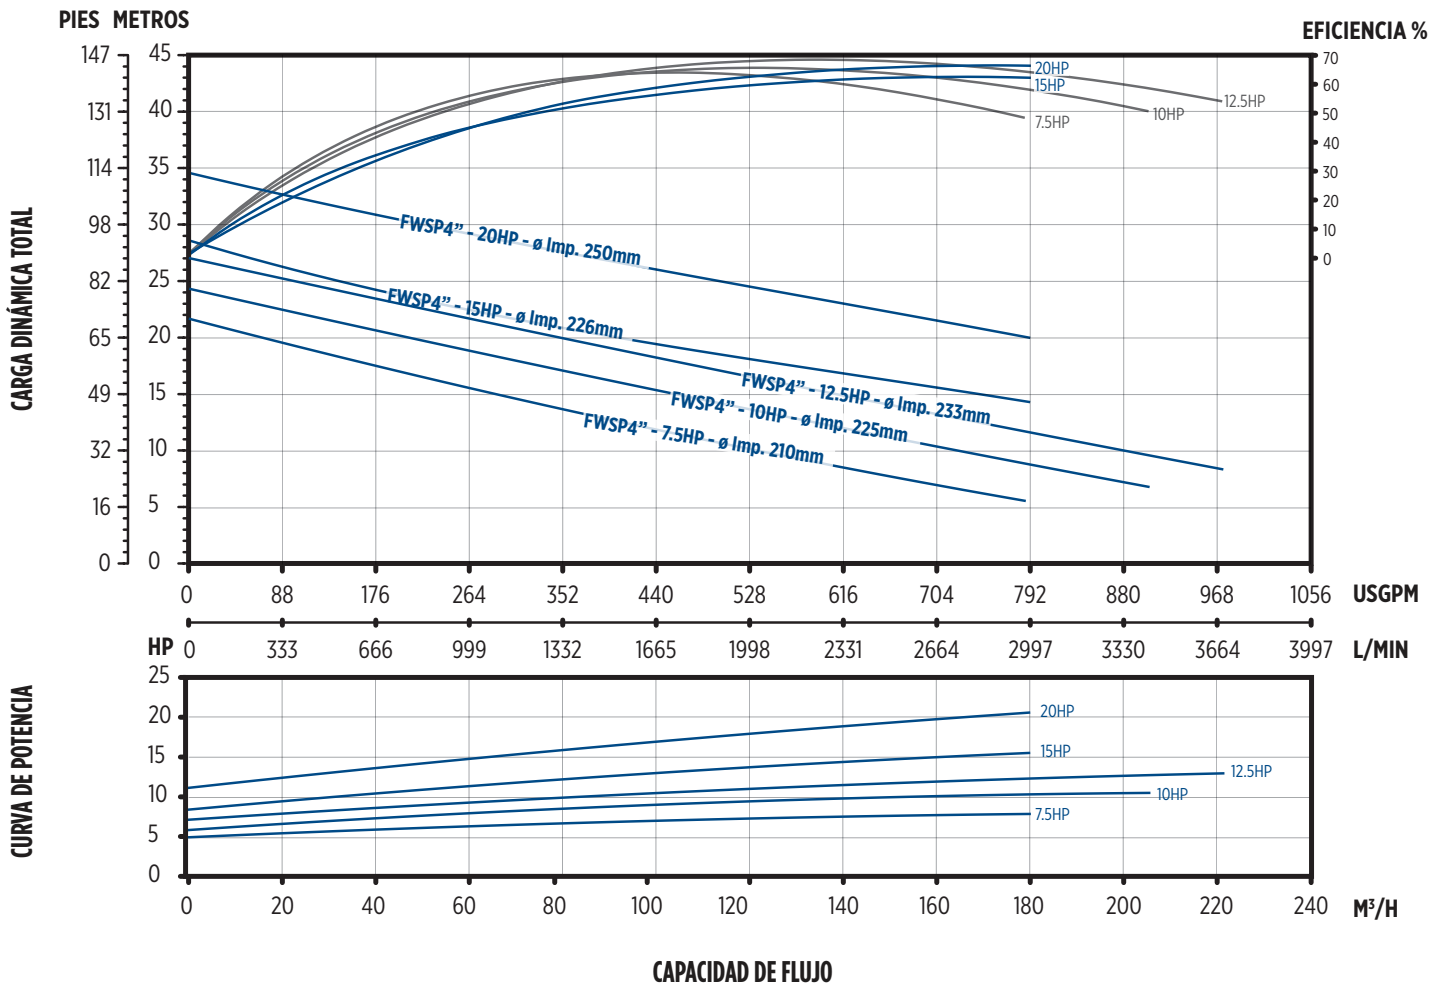

**INFORMACIÓN DE SELECCIÓN**

HP	DESCARGA	PASO DE SÓLIDOS	FASES	VOLTS	RECORTE DE IMPULSOR (MM)	LPM	335	669	1004	1338	1673	2008	2342	2677	3012	3331	3668	MODELO	NO. DE PARTE	
						GPM	88	176	264	352	440	528	616	704	793	880	969			
CARGA EN METROS																				
7.5					230	-												7.5FWSP2303-0403	87100986-00	
					380	210	19.6	17.6	15.6	13.7	11.8	10.3	8.6	7.1	5.5	-	-	7.5FWSP3803-0403	87101006-00	
					460	-														7.5FWSP4603-0403
10		3"			230	-												10FWSP2303-0403	87100988-00	
					380	225	22.5	20.7	18.9	17.2	15.4	13.7	12.1	10.5	8.8	7.3	-	10FWSP3803-0403	87101008-00	
					460	-														10FWSP4603-0403
12.5	4"		3		230	-												12.5FWSP2303-0403	87100990-00	
					380	233	25.3	23.5	21.7	20	18.3	16.6	14.9	13.3	11.7	10.1	8.5		12.5FWSP3803-0403	87101010-00
					460	-														12.5FWSP4603-0403
15					230	-												15FWSP2303-04025	87100992-01	
					380	226	26	24	22	21	19	18	16	15	14	-	-	15FWSP3803-04025	87101012-01	
					460	-														15FWSP4603-04025
20			2.5"		230	-												20FWSP2303-04025	87100994-01	
					380	250	33	31	29	27	26	24	23	21	20	-	-	20FWSP3803-04025	87101014-01	
					460	-														20FWSP4603-04025